



by: AquaMetrix



The new standard in analytical instrumentation

Easy

- *To specify.* One 1/4 DIN controller does it all.
- *To select the parameter.* It's completely menu driven. No "cards" to install.
- *To mount.* "Universal" panel / pipe / wall mounting system is included.
- *To configure.* User-friendly LCD menu on inside panel.
- *To see.* Bright LED digital display.
- *To spot problems:* Unique, bright color-coded bar graph on front panel indicates when relays and alarms are activated.
- *To control access.* Process readout, temperature readout, and calibration are done from the outside. All settings and setpoints must be entered on the inside menu.

Quick

- *To install.* Universal mount system.
- *To wire.* Removable / snap-on terminal connectors.
- *To configure.* LCD menu inside panel is intuitive and user-friendly.
- *To calibrate.* Calibration and temperature functions on the front panel.
- *To check process condition.* Bright LED bar graph indicates when alarms are on (red), relays are on (yellow) and the process is within parameters (green).

Savings

- *Complete.* No extra cards, boards, mounts or enclosures to buy for different applications or for NEMA 4X rating.
- *Less Stock.* One back-up controller for a variety of applications.
- *Reduce downtime.* Easy-to-use calibration on front panel.
- *Eliminate "overshoot"* and chemical waste with relay cycle-timer.
- *Reduce operator error.* Maintenance never needs to access the main menu on the inside panel since calibration is done on the outside front panel.

Now

- pH, ORP, Conductivity and Flow parameters available.
- Dissolved Oxygen coming soon.



Conductivity • pH • ORP • Flow



SUMMARY

SHARK is designed to be the most *flexible, easy to use,* and *easy to see* multi-parameter analyzer/controller on the market.

FOUR MEASURING PARAMETERS

Select the parameter you wish to measure from the easy-to-use LCD menu on the inside front cover. Choose Conductivity, pH, ORP or Flow.

NO EXTRA CARDS / OPTIONS REQUIRED

Each SHARK comes complete. There are no extra costs associated with buying boards for different applications, or buying components to achieve NEMA 4X.

UNIVERSAL MOUNTING

Universal mounting kit is included for surface, panel and pipe-mount applications. The 1/4 DIN enclosure makes panel-mount cutouts and engineering simple.

SNAP-ON TERMINAL CONNECTORS

Wiring is easy with removable / snap-on terminal connectors.

DISPLAYS & MENUS

There are two displays on SHARK. A bright LED numeric display with bar graph on the outside front panel, and a 2-line, 16-character LCD display on the inside. The LED readout on the outside panel can be seen several yards away. The distinctive, color-coded bar graph will immediately indicate if you are within the process parameters that you set (green), if the control relays are on (yellow) and if you are in alarm condition (red). This makes diagnosing pump and alarm malfunctions easy. All configuration and control functions are performed on the LCD menu on the inside front panel.

SENSOR INPUT

Shark can display actual raw electronic signals from the sensor, an indispensable function when troubleshooting. Check the mV from a pH or ORP probe, Ω from a temperature sensor or the Hz from a paddle wheel.

CALIBRATION

Calibration is performed easily from the front panel. Temperature (where applicable) is also checked from the front. Since this routine maintenance does not require

opening the front panel to access the main menu on the inside, configuration settings cannot be adjusted by mistake. Process and temperature (where applicable) calibration can also be performed from the LCD menu, where calibration data (slope, temperature and efficiency) are displayed. pH can be calibrated using Manual or Auto Calibration methods. Calibration data can be recalled, indicating calibration mode, accepted buffer values, actual sensor input signals, calibration temperature and more.

ANALOG OUTPUTS

SHARK provides three analog outputs. These include two isolated independent scalable 4-20 mA outputs, and a non-isolated 0-1 mA or 0-5 Vdc output.

RELAYS WITH CYCLE TIMERS

The instrument also provides control of external devices using its two independent control relays. A third relay is pre-set to act as an alarm relay, but can be used as a process control relay. It has both high and low on setpoints with adjustable off setpoints. Factory set for bidirectional control, both control relays can be set for either a rising or falling process, with easily programmed on setpoints and off setpoints. Each control relay has a built-in independent cycle timer, with field-set on and off times. This feature enables tighter control of batch processes by eliminating chemical overshoot.

AUTOMATIC OR MANUAL TEMPERATURE COMPENSATION

Temperature compensation override can be turned on or off through the LCD menu. Temperature compensation override is factory preset in "off" mode to accept a temperature signal from a probe. When temperature compensation override is turned on, the user must input a reference temperature to use for all temperature calculations. In Conductivity mode, the degree of temperature compensation is pre-set from the factory but can be easily adjusted by the user to suit a particular application.

ENCLOSURE

SHARK is packaged in a rugged NEMA 4X polycarbonate enclosure making it ideally suited for heavy-duty applications such as industrial wastewater neutralization, municipal water and wastewater, pulp and paper, and process control.



Multi-parameter Controller and Analyzer

Bright LED exterior menu panel

Bright seven segment display

Quarter-turn screws to restrict access to interior menu panel

1/4 DIN design for easy panel cutouts

Green LED indicates controller is in "run" mode



Sturdy polycarbonate construction

NEMA 4X enclosure

7 segment bar graph

- 3 green LED's indicate within process limits
- 2 yellow LED's indicate relays activated
- 2 red LED's indicate alarm condition

Calibrate from the front panel

Check temperature from the front panel

Makes calibration easy...

Auto Cal and Manual Cal from the front menu

...and reading temperature too.

In °C or °F





Easy to use interior LCD menu panel

Removable “snap-on” terminal block connectors



Main menu interface screen


2 line, 16 character LCD menu for fast & easy setup

Simple three-button menu interface

Select parameter



Select calibration method

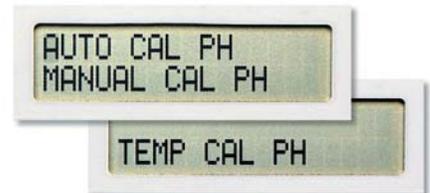

Relay setup





Multi-parameter Controller and Analyzer

Technical Data


	pH	ORP	Conductivity	Flow
Display	Front Panel: 4 x 7 segment 1/2" LED display, 1 LED indicator On-line, 7 LED Bar Graph Inside Panel: 2 x 16 alpha-numeric display			
Power Requirements	120Vac 50/60Hz or 240Vac 50/60Hz (less than 12VA)			
Measuring Range	pH: 0.01 to 14.00 Temp: 0 - 100°C or 32° - +212°F	ORP: -1999 to +1999mV Temp: 0 - 100°C or 32° - +212°F	uS/cm: 0 - 2,000, 0 - 20.00, 0 - 200.0, 0 - 2000 mS/cm: 0 - 2,000, 0 - 20.00, 0 - 200.0 MΩ/cm: 0 - 19.99 Temp: 0 - 100°C or 32° - +212°F	Flow: 0 - 9999 with selectable flow rate units Volume: 0 - 9999 with Selectable multiplier Flow rate units: GPM, CFS, LPS, CMS, custom by entering factor related to GPM
Temperature Compensation	Automatic or Manual 0 - 100°C (32° - +212°F)	Not required	Automatic or Manual User selectable temperature compensation slope 0-10%/°C. 0 to 100°C (32° - +212°F)	Not required
Temperature Unit	°C or °F			Not required
Temperature Sensor	User selectable 300Ω NTC or 3000Ω NTC Thermistors			Not required
Calibration Modes	Auto-Calibration Manual Calibration Temperature Calibration	Manual Calibration Temperature Calibration	Dry Calibration Sample Calibration Temperature Calibration	K factor Input
Ambient Conditions	Temperature: 5°C - +50°C or 41°F - +113°F Humidity: 0 to 90% RH (non-condensing)			
Menu Access Front Panel	Auto-Calibration, Manual Calibration, Temperature Display	Manual-Calibration, Temperature Display	Dry-Calibration, Manual Calibration, Temperature Display	K Factor input
Menu Access Inside Panel	Full Access to all parameters of operations menu			
Sensor to SHARK Distance	Differential: 3000 ft Combinational: 10ft		300 ft	2000 ft
Relay Outputs	Two Control Relays, 10A / NO, 5A / NC @ 240VAC or 28VDC. Mode: Process control, Adjustable parameters: process direction, (rising or falling) on-set-point, off set-point, (0 to 100% of full scale), cycle timer (on / off, 0 to 600 seconds), failsafe (on / off). One Alarm Relay, 10A / NO, 5A / NC @ 240VAC or 28VDC. Mode: High / Low Alarm, Adjustable parameters: Low on / Low off set-point (0 to 100% of full scale, low on must be less than low off), High On / High Off set-point (0 to 100% of full scale, High on must be greater than High off).			
Analog Outputs	4-20mA Channel 1 Isolated Output, Range expand 0 - 100% of full scale (min segment 10% of full scale), max. load 800Ω 4-20mA Channel 2 Isolated Output, Range expand 0 - 100% of full scale (min segment 10% of full scale), max. load 800Ω Can be set to track temperature if sensor is equipped with a temperature sensor 0-5V / 0-1mA Non-Isolated Output, Range expand 0-100% of full scale (min segment 10% of full scale), min. load 1000Ω Can be set to track temperature if sensor is equipped with a temperature sensor			
Memory Back-up	All user settings are retained indefinitely in memory (EEPROM)			
Mechanical	Enclosure: NEMA 4X, 1/4 DIN, polycarbonate enclosure with four 1/2" conduit holes Mounting: Universal Mounting kit for surface, pipe and panel mount, is included			
Sensor Input	Probe: -600 - +600mV Temp. Sensor: 0 - 30KΩ	Probe: -1999 - +1999mV Temp. Sensor: 0 - 30KΩ	Cell: 0-30KΩ Temp. Sensor: 0 - 30KΩ	Paddle: 0 - 400Hz
Invalid Entries	Invalid entries can not be stored			
Manual Test Mode	Process value can be simulated with arrow keys to verify correct setup of outputs			
Manual Relay Override	Relays can be set to on / off / auto, to verify correct wiring of auxiliary devices, or to manually adjust process			
Output Hold	All outputs are placed on hold when SHARK is in Menu mode			
Calibration Data	Recall data from last calibration, calibration mode, 1st & 2nd accepted buffer value and probe mV output, calibration temperature, calibration slope, and probe efficiency		Recall data from last calibration, calibration buffer accepted value, and cell resistance, calibration temperature	Recall store K factor.
Auto Return	User selectable auto return if SHARK is left in menu mode or if relays are left in manual override mode greater than 10 min.			
Display Damping	User can select rate at which SHARK updates display. Enables display damping of unstable process			
Net Weight	2.2lbs (1kg)			
Approvals	ULC (pending)			

Ordering Information: SHARK-120 120 Volt, 50/60 Hz Power
SHARK-240 240 Volt, 50/60 Hz Power




Dimensions

Inches (mm)

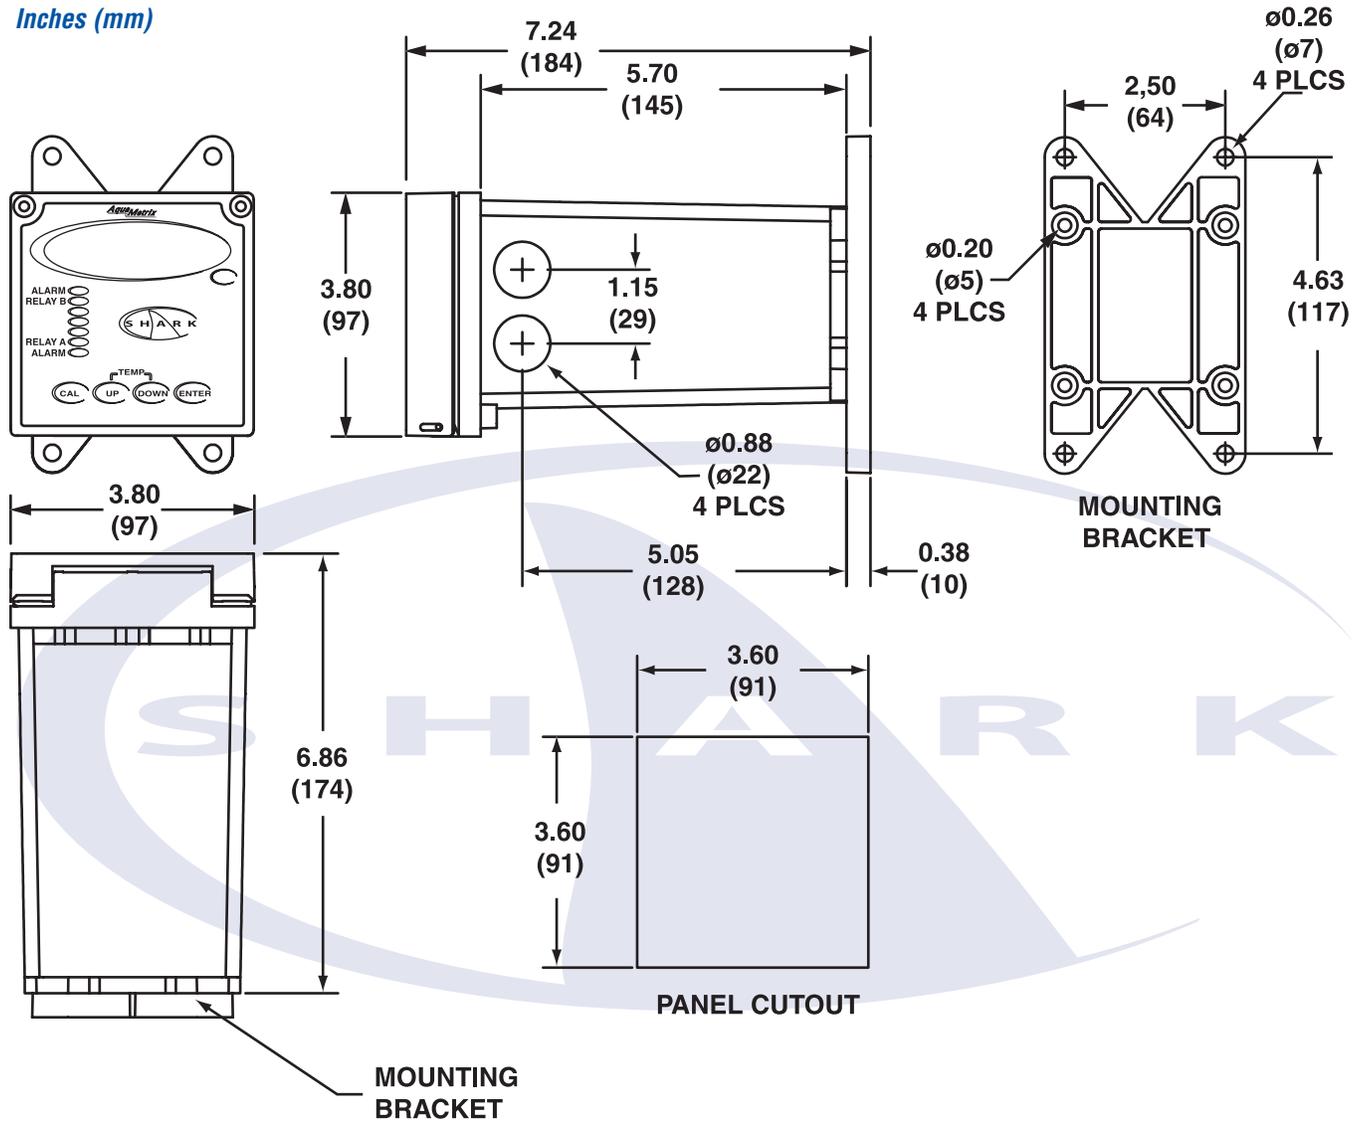

MOUNTING CONFIGURATIONS

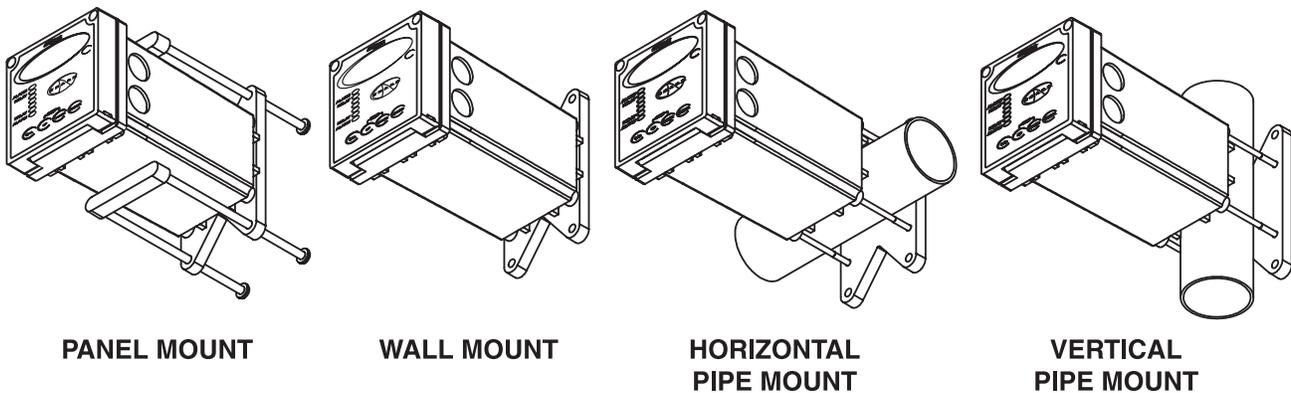

AquaMetrix

3369 Democrat Road

Memphis, Tennessee

USA

38118

22-121 Granton Dr.

Richmond Hill, Ontario

Canada

L4B 3N4

Toll Free: 1-800-742-1413

email: sales@aquamatrix.com

web: www.aquamatrix.com

t. 905-763-8432

f. 905-763-9480

DISTRIBUTED BY:

